



TYRE & TUBE REPAIRS

Catalog vol.4





- Bestpatch Radial Repair Patches constructed with special rubber compound and polyester fibers. Unique single direction ply and locking wedge construction offers high strength and flexibility.
- Gives permanent repair over the injury.
- Used to repair crown, sidewall and shoulder injuries in Passenger, Light truck, Truck, Tractor and Earthmover tyres.
- Separate crown injury repair units to be used for crown injuries*
- Cloth back & uncure patches are available
- Can be cured chemically (cold cure) or with any retread systems (heat cure).
- Use bestpatch chemical vulcanizing cement for perfect bonding.

Ref. No.	Description	Inch	Size	mm	Ply	Box Qty	
2001	CRP 10	3" x 2"		75 x 50	1	20	
2001A	CRP 10HD	3½" x 2½"		85 x 65	1	20	
2002	CRP 12	4¼" x 2½"		110 x 65	1	10	
2002A	CRP 12HD	4¾" x 3"		120 x 75	1	10	
2003	CRP 14	6" x 3"		150 x 80	1	10	
2004	CRP 20	5" x 3"		130 x 80	2	10	
2004 A	CRP 20HD	5¾" x 3½"		145 x 90	2	10	
2005	CRP 22	7" x 3"		180 x 80	2	10	
2006	CRP 24	8½" x 3½"		220 x 90	2	10	
2007	CRP 26	10" x 3½"		250 x 90	3	10	
2031	CRP 28	12¾" x 3½"		325 x 90	2	10	
2011	CRP 40	8" x 4"		200 x 100	3	10	
2011A	CRP 40HD	8½" x 4¾"		220 x 120	3	10	
2012	CRP 42	10" x 5"		250 x 125	4	10	
2013	CRP 44	13" x 5"		330 x 125	4	10	
2028	CRP 15*	3½" x 3"		90 x 75	1	20	
2029	CRP 17*	4½" x 3½"		105 x 90	2	10	
2008	CRP 33*	5" x 4"		125 x 100	3	10	
2009	CRP 35*	6" x 5"		150 x 125	4	10	
2010	CRP 37*	7" x 5"		175 x 125	4	10	
2014	CRP 45*	9" x 7"		230 x 180	4	10	
2015	CRP 55*	13" x 10"		330 x 255	5	10	
2016	CRP 65*	16" x 13"		410 x 330	6	5	
2017	CRP 75*	21" x 18"		535 x 455	8	5	
2032	CRP 85*	29" x 21"		740 x 535	8	5	
2018	CRP 46	16" x 5 ½"		405 x 140	4	10	
2018A	CRP 46HD	17 ¾" x 6 ¾"		440 x 170	4	10	
2035	CRP 48	17 ¾" x 7 ½"		440 x 190	4	5	
2019	CRP 50	20" x 7 ½"		500 x 190	5	5	
2020	CRP 52	20" x 10 ¾"		500 x 250	5	5	
2020A	CRP 52HD	23 ¾" x 10 ¾"		595 x 265	5	5	
2021	CRP 56	26" x 10 ¾"		660 x 260	6	5	
2021A	CRP 56HD	29 ½" x 11 ¾"		750 x 290	7	5	
2022	CRP 60	34" x 10 ½"		860 x 265	7	5	
2023	CRP 72	30" x 14"		760 x 350	7	5	
2030	CRP 76	40½" x 12¾"		1030 x 325	7	5	
2024	CRP 80	8" x 6"		200 x 150	2	10	
2025	CRP 82	9½" x 7"		240 x 180	3	10	
2026	CRP 84	11½" x 8½"		290 x 215	3	10	
2027	CRP 86	13½" x 10"		340 x 250	3	10	
2033	CRP 88	18" x 11"		460 x 280	2	10	
2034	CRP 90	22" x 13½"		560 x 340	2	10	

* For Crown Injuries only




- Constructed with special rubber compound and nylon fibers.
- Fabric construction designed to match the cross ply tyre construction.
- High strength, flexible and shock absorbing
- To repair crown, shoulder and sidewall injury in all bias ply tyres ranging from passenger to earth mover.
- Injuries from 1/8" (3 mm) to 5" (125 mm) can be repaired.

- Can be cured chemically (cold cure) or with any retread systems (heat cure).
- Use with bestpatch chemical vulcanizing fluid for perfect bonding.
- For the repairs in tractor tyres separate series of patches (CTP) available with large fabric area and lesser ply.
- For sidewall repairs separate series of patches (CSP) available.
- The sidewall patch design enable perfect fit in the tyre sidewall.
- Refer injury chart for proper selection of the patch.

Ref. No.	Description	Inch	Size	mm	Ply	Box Qty	
Nail Hole Repairs							
1000	CBP 0	2"		50	1	20	
1001	CBP 1	2½"		65	1	20	
1002	CBP 2	3½"		90	2	20	
Section Repairs							
1003	CBP 3	4" x 4"		100 x 100	2	10	
1004	CBP 4	5½" x 5½"		140 x 140	4	10	
1005	CBP 5	7" x 7"		175 x 175	4	10	
1006	CBP 6	9½" x 9½"		240 x 240	6	5	
1007	CBP 7	11¾" x 11¾"		300 x 300	6	5	
1008	CBP 8	13½" x 13½"		340 x 340	6	5	
1009	CBP 9	15½" x 15½"		390 x 390	8	5	
1010	CBP 10	17" x 17"		430 x 430	8	5	 
Sidewall Repairs							
1011	CSP 4	6" x 6"		150 x 150	4	10	
1012	CSP 5	7½" x 7½"		190 x 190	4	10	
1013	CSP 6	10" x 10"		255 x 255	6	5	
1014	CSP 7	11¾" x 11¾"		300 x 300	6	5	
1015	CSP 8	13¾" x 13¾"		350 x 350	6	5	
1016	CSP 9	14½" x 14½"		365 x 365	8	5	
1017	CSP 10	16¾" x 16¾"		420 x 420	8	5	
Tractor Repairs							 
1020	CTP 1	9½" x 9½"		240 x 240	4	5	
1021	CTP 2	11¾" x 11¾"		300 x 300	4	5	
1022	CTP 3	15½" x 15½"		390 x 390	4	5	
1023	CTP 4	9½" x 9½"		240 x 240	6	5	
1024	CTP 5	11¾" x 11¾"		300 x 300	6	5	
1025	CTP 6	15½" x 15½"		390 x 390	6	5	
1026	CTP 7	19" x 19"		480 x 480	6	5	

Butterfly shaped OTR repair patches

- Constructed with special rubber compounds and strong nylon fibers.
- Butterfly shaped OTR repair units are constructed with a innovatively designed fabric layers which enable excellent sidewall reinforcement in section repairs.
- Uncure and cloth back OTR repair patches are available.
- Injury specific patches can be made at request

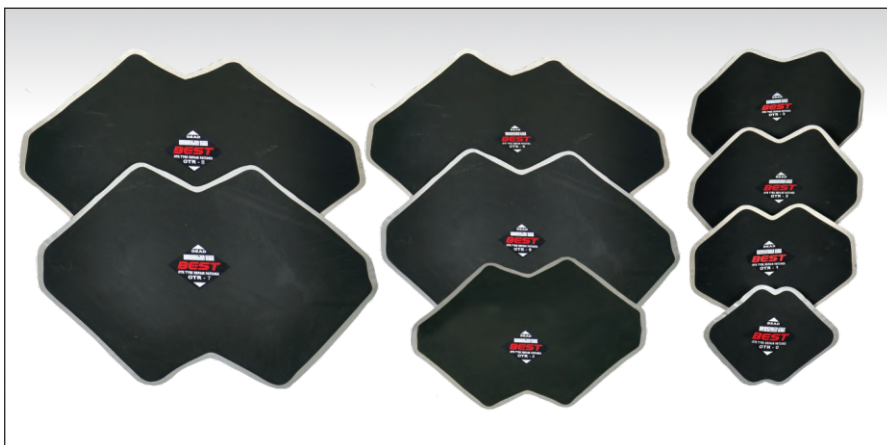

Ref. No.	Description	inch	Size	mm	Box Qty	
1030	OTR BU 0	8 5/8" x 8 5/8"		220 x 220	5	
1031	OTR BU 1	10 1/4" x 10 1/4"		260 x 260	5	
1032	OTR BU 2	12" x 12"		305 x 305	5	
1033	OTR BU 3	14 3/8" x 14 3/8"		365 x 365	3	
1033A	OTR BU 3.5	17 3/8" x 17 3/8"		440 x 440	2	
1034	OTR BU 4	18 1/8" x 18 1/8"		460 x 460	2	
1035	OTR BU 5	19" x 19"		485 x 485	2	
1036	OTR BU 6	21 3/8" x 21 3/8"		550 x 550	2	
1037	OTR BU 7	23" x 23"		585 x 585	2	
1038	OTR BU 8	24 3/8" x 24 3/8"		620 x 620	2	

Square shaped OTR repair patches

- Constructed with special rubber compounds and strong nylon fibers.
- Unique cross ply construction of fabric ply gives maximum flexibility, strength in square shaped OTR repairs.
- Large repairs possible with a smaller patch. Uncure and cloth back OTR repair patches are available.
- Injury specific patches can be made at request



Ref. No.	Description	inch	Size	mm	Box Qty	
1040	OTR SQ 0	7 1/4" x 7 1/4"		185 x 185	5	
1041	OTR SQ 1	8 1/4" x 8 1/4"		210 x 210	5	
1042	OTR SQ 2	9 1/4" x 9 1/4"		235 x 235	5	
1043	OTR SQ 3	11 1/4" x 11 1/4"		285 x 285	3	
1044	OTR SQ 4	13 3/8" x 13 3/8"		340 x 340	3	
1045	OTR SQ 5	15 3/8" x 15 3/8"		390 x 390	2	
1046	OTR SQ 6	17 3/8" x 17 3/8"		440 x 440	2	
1047	OTR SQ 7	20" x 20"		510 x 510	2	
1048	OTR SQ 8	21" x 21"		535 x 535	2	
1049	OTR SQ 9	23" x 23"		585 x 585	2	

To order uncure patches suffix 'UC' - for example OTR SQ 6 -UC

To order cloth back patches suffix 'CB' - for example OTR SQ 6 -CB



- Bestpatch Radial Repair Patches constructed with special rubber compound and polyester fibers.
- Integrated cushion layer construction.
- Unique single direction ply and full wedge construction offers high strength and flexibility.
- Gives permanent repair over the injury.
- Used to repair crown, sidewall and shoulder injuries in Passenger, Light truck, Truck, Tractor and Earthmover tyres.
- Separate crown injury repair units to be used for crown injuries.
- Can be cured chemically (cold cure) or with any retread systems (heat cure).
- Use bestpatch Blue Cement for perfect bonding.

Ref. No.	Description	Size	Ply	Box Qty	
		Inch	mm		
2100	RX-10	3 x 2 1/8"	75 x 55	1	20
2100A	RX-10HD	3 1/2" x 2 1/2"	85 x 65	1	20
2101	RX-12	4 1/4" x 2 1/2"	110 x 65	1	10
2101A	RX-12HD	4 3/4" x 3 1/8"	120 x 80	1	10
2102	RX-14	6" x 3 1/8"	150 x 80	1	10
2013	RX-20	5 1/8" x 3 1/2"	130 x 85	2	10
2103A	RX-20HD	5 3/4" x 3 1/2"	145 x 90	2	10
2104	RX-22	7 1/2" x 3 1/2"	190 x 90	2	10
2105	RX-24	8 1/2" x 3 1/2"	220 x 90	2	10
2106	RX-26	10" x 3 1/2"	250 x 90	3	10
2107	RX-28	12 3/4" x 3 1/2"	325 x 90	2	10
2113	RX-40	8" x 4"	200 x 100	3	10
2113A	RX-40HD	8 1/2" x 4 3/4"	220 x 120	3	10
2114	RX-42	10 3/4" x 5 1/8"	260 x 130	4	10
2115	RX-44	13" x 5 1/8"	330 x 130	4	10
2108	RX-15*	3 1/2" x 3"	90 x 75	1	20
2109	RX-17*	4 3/8" x 3 1/2"	105 x 90	2	10
2110	RX-33*	5" x 4"	130 x 100	3	10
2111	RX-35*	6" x 5"	150 x 125	4	10
2112	RX-37*	7" x 5"	175 x 125	4	10
2116	RX-45*	9" x 7"	230 x 180	4	10
2117	RX-55*	13" x 10"	330 x 255	5	10
2118	RX-65*	15 3/4" x 12 1/2"	400 x 320	6	5
2119	RX-75*	20 3/8" x 18"	525 x 455	8	5
2120	RX-85*	29" x 21"	740 x 535	8	5
2121	RX-46	15 3/4" x 5 1/8"	400 x 130	4	10
2121A	RX-46HD	17 3/8" x 6 3/8"	440 x 170	4	10
2122	RX-50	20" x 7 1/2"	510 x 190	5	5
2123	RX-52	19 1/2" x 10"	495 x 250	5	5
2123A	RX-52HD	23 3/8" x 10 3/8"	595 x 265	5	5
2124	RX-56	26" x 10 1/4"	660 x 260	6	5
2124A	RX-56HD	29 1/2" x 11 3/8"	750 x 290	7	5
2125	RX-72	30" x 13 3/4"	760 x 350	7	5
2126	RX-80	7 1/2" x 5 3/4"	190 x 145	2	10
2127	RX-82	9 1/2" x 7"	240 x 175	3	10
2128	RX-84	11 1/2" x 8 1/2"	295 x 215	3	10
2129	RX-86	13 3/8" x 9 3/4"	340 x 245	3	10
2130	RX-88	18" x 11"	460 x 280	2	10
2131	RX-90	22" x 13 1/2"	560 x 345	2	10



Bias Ply Tyre Repair Patches - BX - Series

Ref. No.	Description	Size		Ply	Box Qty	
		inch	mm			
1100	BX - 0	1 ¼"	45	1	25	    
1101	BX - 1	2 ⅜"	60	1	25	
1102	BX - 2	3 ⅛"	80	2	10	
1103	BX - 3	4 ½" x 4 ½"	115 x 115	2	10	
1104	BX - 4	5 ¾" x 5 ¾"	145 x 145	4	10	
1105	BX - 5	7 x 7	175 x 175	4	10	
1106	BX - 6	9 ½" x 9 ½"	240 x 240	6	5	
1107	BX - 7	11 ¾" x 11 ¾"	300 x 300	6	5	
1108	BX - 8	13 ½" x 13 ½"	340 x 340	6	5	
1109	BX - 9	15 ½" x 15 ½"	390 x 390	8	5	
1110	BX - 10	17 x 17	430 x 430	8	5	

Tube Repairs - R - Series (Round) & V - Series (Oval)



Ref. No.	Description	Size		Box Qty
		inch	mm	
5000	R0 - 100 pcs / box	1 ⅛"	28	24
5001	R1 - 50 pcs / box	1 ½"	38	24
5002	R2 - 30 pcs / box	2"	48	24
5003	R3 - 25 pcs / box	2 ¼"	58	24
5004	R4 - 20 pcs / box	3"	75	24
5005	R5 - 10 pcs / box	3 ¾"	95	24
5006	R6 - 10 pcs / box	4 ½"	115	24
5021	V0 - 50 pcs / box	1 ¾" x 1 ⅛"	45 x 30	24
5022	V1 - 30 pcs / box	3" x 1 ½"	75 x 38	24
5023	V2 - 20 pcs / box	3 ½" x 1 ¾"	90 x 45	24

Universal Repairs - UX - Series



Ref. No.	Description	Size		Box Qty
		inch	mm	
5100	UX - 3	1 ½" x 1 ½"	36	100
5101	UX - 4	2" x 2"	48	100
5102	UX - 5	2 ⅛" x 2 ⅛"	53	100
5103	UX - 6	2 ¼" x 2 ¼"	58	50
5104	UX - 7	2 ¾" x 2 ¾"	67	50

Steel Reinforced Patches



Steel Reinforced Patches

- Made of best quality steel cord impregnated with high strength rubber compounds.
- Stronger and flexible.
- Suitable for all vulcanising systems.
- Suitable for all radial and tubeless tyres.

Ref. No.	Description	Size		Qty
		Inch	mm	
2301	S31 Steel	6¼" x 3"	160 x 80	10
2302	S33 Steel	8" x 3½"	205 x 90	10
2303	S35 Steel	9½" x 4"	240 x 105	10
2304	S37 Steel	11" x 4½"	280 x 115	10
2305	S39 Steel	12½" x 4½"	320 x 115	10
2306	S41 Steel	14¼" x 4½"	360 x 115	10
2307	S43 Steel	17¼" x 4½"	440 x 115	10

Aramid Reinforced Patches



Aramid Reinforced Patches

- Aramid repair patches made of superior quality Aramid cord, gives maximum strength in tyre repair.
- Three times stronger than the polyester cord.
- Reduced fabric plies, reduces the patch weight.
- Low heat buildup in the tyres.
- Improved flexibility ensures easy application in the tyre contour.

Ref. No.	Description	Size		Qty
		Inch	mm	
2501	C31 Steel	6¼" x 3"	160 x 80	10
2502	C33 Steel	8" x 3½"	205 x 90	10
2503	C35 Steel	9½" x 4"	240 x 105	10
2504	C37 Steel	11" x 4½"	280 x 115	10
2505	C39 Steel	12½" x 4½"	320 x 115	10
2506	C41 Steel	14¼" x 4½"	360 x 115	10
2507	C43 Steel	17¼" x 4½"	440 x 115	10

Uni Plug Repairs for Radial & Bias Tyres

- Combination of patch and stem covered with dual cure cushion gum with pilot wire.
- To repair crown injuries in both Radial & Bias ply passenger, light truck & Truck Tyres.
- Tyre industry recommended puncture repair procedure for tubeless tyre punctures.
- Appropriate carbide cutters to be used for steel belted radial tyres and bias plug cutters for bias ply nylon tyres.
- Use with bestpatch chemical vulcanizing fluid for perfect bonding.



- The angle of injury should be less than 20°
- For perfect compression fit of the stem in the tyre the stem size should be larger than the prepared injury size.



Ref. No.	Description	Plug patch size	Injury size	Carbide cutter	Bias cutter	Box Qty
3000	Uni Plug 4.5W	Stem 4.5 mm Length 25 mm Patch 35 mm	1/8" (3mm) injury	CC-2		40
3001	Uni Plug 6W	Stem 6 mm Length 35 mm Patch 43 mm	1/8" (4.5mm) injury	CC-0		10
3002	Uni Plug 9W	Stem 9 mm Length 35 mm Patch 50 mm	1/4" (6mm) injury	CC-1		10
3003	Uni Plug 9U	Stem 9 mm Length 45 mm Patch 75 mm	1/4" (6mm) injury	CC-1A		12
3004	Uni Plug 12U	Stem 12 mm Length 50 mm Patch 75 mm	3/8" (9mm) injury	CC-3	BC-0	12

Radial Plug Repairs

- Combination of polyester fabric reinforced patch and stem covered with dual cure cushion gum.
- Patch construction and bead marking makes repairs perfect for radial tyres.



- Safe, secure & fast way to repair punctures up to 13mm in all radial tyres.
- Eliminates long filler gum curing time. Use with chemically or heat.
- Appropriate carbide cutters to be used for drilling the injury.



Ref. No.	Description	Plug patch size	Injury size	Ply	Carbide cutter	Box Qty
3005	Radial Plug RP 9	Stem 9 mm Length 43 mm Patch 75 x 60 mm	1/4" (6mm) injury	1	CC-1A	12
3006	Radial Plug RP 12	Stem 12 mm Length 50 mm Patch 100 x 80 mm	3/8" (9mm) injury	2	CC-3	12
3007	Radial Plug RP 16	Stem 16 mm Length 70 mm Patch 110 x 90 mm	1/2" (12mm) injury	3	CC-4	8

Bias Plug Repairs

- Combination of nylon fabric reinforced patch and stem covered with dual cure cushion gum.
- Cross ply Patch construction and bead marking makes repairs perfect for Bias ply tyres.



- Fast & easy way to repair punctures up to 25mm in all Bias ply tyres.
- Eliminates long filler gum curing time. Use with chemically or heat.
- Appropriate bias plug cutters to be used for drilling the injury.



Ref. No.	Description	Plug patch size	Injury size	Ply	Bias plug cutter	Box Qty
3008	Bias Plug PP16	Stem 16 mm Length 70 mm Patch 130 X 130 mm	1/2" (12mm) injury	3	BC-1	6
3009	Bias Plug PP 22	Stem 22 mm Length 70 mm Patch 140 X 140 mm	3/4" (20mm) injury	3	BC-2	4
3010	Bias Plug PP 30	Stem 30 mm Length 70 mm Patch 150 X 150 mm	1" (25mm) injury	4	BC-3	4

Stems for Radial & Bias Tyres

- Bestpatch stem units made of cured special rubber compound wrapped with dual cure cushion gum.
- Repairs using stem repair units eliminates long filler gum curing time.
- Stems used when the angle of injury is more than 20° where plug repairs cannot be used.
- Universal or Radial or Bias ply patches should be used for reinforcement.

- Appropriate carbide cutters to be used for steel belted radial tyres and bias plug cutters for bias ply nylon tyres.
- For perfect compression fit of the stem in the tyre, stem size should be larger than the injury size.
- Use with bestpatch chemical vulcanizing fluid for perfect bonding



Ref. No.	Description	Plug patch size	Injury size	Carbide cutter	Bias cutter	Box Qty
3016	Stem 6	Stem 6mm Length 35mm	¼" (3 mm) injury	CC-0		20
3011	Stem 9	Stem 9mm Length 43 mm	¼" (6mm) injury	CC-1A		10
3012	Stem 12	Stem 12mm Length 50 mm	⅜" (9mm) injury	CC-3	BC-0	10
3013	Stem 16	Stem 16mm Length 70 mm	½" (12mm) injury	CC-4	BC-1	10
3014	Stem 22	Stem 22mm Length 70 mm	¾" (20mm) injury	CC-5	BC-2	10
3015	Stem 30	Stem 30mm Length 70 mm	1" (25mm) injury	CC-6	BC-3	10
3017	Wire Puller					10

Universal Repairs

- Universal repair patches made of thicker rubber patch with self vulcanizing grey cushion gum to use in small pin hole injuries in all tyres. Also used for tube repairs where thicker patch necessary.



Ref. No.	Description	Size inch	Size mm	Box Qty
4200	Universal Round Repair UR 0	1½"	40	100
4201	Universal Round Repair UR 1	2 ⅛"	53	30
4202	Universal Round Repair UR 2	3 ⅛"	80	30
4205	Universal Square Repair UR 5	1 ¾" x 1 ¾"	45 x 45	100
4203	Universal Square Repair UR 3	2 ¾" x 2 ¾"	60 x 60	30
4204	Universal Square Repair UR 4	3" x 3"	75 x 75	30

Repair Procedure For Plug Patches



Rim out the tyre from the wheel and check for the injury



If repairable by Plug Patch mark the injury inside and outside. Check the size and angle of injury (angle should be less than 15°) and select the patch



Clean the inner liner and Buff the surface 10 mm more than the patch size



Using low r.p.m. air/electric tool drill the injury by selected carbide cutter from inside and outside. Inspect the same completely.



Clean the dust in the buffed area and apply CVF into the drilled hole and the buffed surface. Let it dry for few minutes.



Open the blue polythene from the Plug Patch and insert the wire through the injury from inside.



Pull the wire using plier and press the patch gently by hand first. Than stitch it using sticher. Apply sealant over the patch.



Cut the excess stem above 3mm from the tread



Tyre ready for service

Chemical Vulcanizing Fluid



- Bestpatch chemical vulcanizing fluids formulated to give perfect room temperature vulcanization when used in conjunction with bestpatch tyre and tube repairs.
- Available in various sizes. ● Brush in tins available

Ref. No.	Description	Size	Box Qty
4017	Chemical Vulcanizing Fluid in collapsible tube	30 ml	25
4018	Chemical Vulcanizing Fluid in collapsible tube	75 ml	20
4022	Chemical Vulcanizing Fluid - brush in tin container	125 ml	10
4019	Chemical Vulcanizing Fluid - brush in tin container	250 ml	10
4021	Chemical Vulcanizing Fluid - brush in tin container	500ml	10
4020	Chemical Vulcanizing Fluid - brush in tin container	1000 ml	10

Blue Cement



- Provide excellent bonding between patch and tyre in cold curing
- Available in various sizes

Ref. No.	Description	Size	Box Qty
4040	Blue Cement cold Vulcanizing fluid - brush in tin container	125 ml	10
4041	Blue Cement cold Vulcanizing fluid - brush in tin container	250 ml	10
4042	Blue Cement cold Vulcanizing fluid - brush in tin container	500 ml	10
4043	Blue Cement cold Vulcanizing fluid - brush in tin container	1000 ml	10

Bead Sealer & Pre buff Cleaner



- Bead sealer applied to the tyre beads during the mounting of tyres
- Prevents leaks between tyre and rim ● Shorter drying time

Ref. No.	Description	Size	Box Qty
4050	Bead Sealer - brush in tin container	1000 ml	10

- Pre buff cleaner will dissolve the contaminants in the buffing area and gives cleaner surface for buffing
- Use for tyre and tube repair

Ref. No.	Description	Size	Box Qty
4060	Pre buff cleaner - brush in tin container	1000 ml	10


Tyre Mounting Paste



- Function as a good tyre lubricant and to seal the tyre bead
- Lubricates tyres for easier mounting and demounting from the rims and bead damages reduced
- Water soluble
- Rust inhibitors added

Ref. No.	Description	Size	Box Qty
4033	Tyre Mounting Paste	0.5Kg.	18
4030	Tyre Mounting Paste	1 Kg.	6
4031	Tyre Mounting Paste	5 Kg.	4
4032	Tyre Mounting Paste	20 Kg.	1

Bias ply Tyre Repair Chart

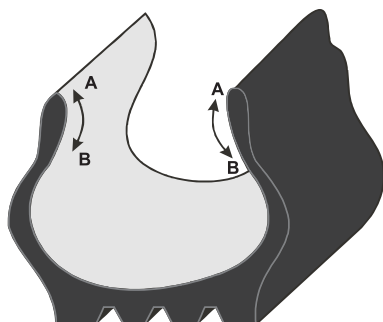

A-B NON REPAIRABLE AREA		
7.00-8.75	3"	75 mm
9.00-14.00	4"	100 mm
16.00-18.00	5"	125 mm
21.00-27.00	6"	150 mm

Tractor Tyre Repair Chart

NON-REPAIRABLE AREA - TRACTOR		
14.9-20.8	4"	100 mm
23.1 and above	5"	125 mm

OTR (Off The Road) Bias Repair Chart

A-B NON REPAIRABLE AREA		
16.00-18.00 (20.5 -23.5)	5"	110 mm
26.00-27.00 (26.5-33.5)	6"	150 mm
30.00-33.00 (37.25 -37.5)	7"	175 mm
36.00 and above	8"	200 mm

SIZE OF INJURY																				
PLY RATING	Inch	⅛"	¼ "	⅜"	½ "	¾ "	1"	1½ "	2"	2½"	3"	4"	4½ "	5"						
	mm	3	6	10	13	20	25	40	50	65	75	100	115	125						
	4	CBP 0	CBP 0	CBP 1	CBP 2	CBP 3	CBP 3	CBP 4	CBP 5											
	6-8	CBP 0	CBP 1	CBP 2	CBP 3	CBP 3	CBP 4	CBP 4	CBP 5											
	10-12	CBP 0	CBP 1	CBP 2	CBP 3	CBP 4	CBP 4	CBP 5	CBP 6	CBP 6	CBP 7	CBP 8								
	14-16	CBP 0	CBP 1	CBP 3	CBP 4	CBP 4	CBP 5	CBP 6	CBP 6	CBP 7	CBP 7	CBP 8	CBP9	CBP10						
	18-20	CBP 0	CBP 1	CBP 4	CBP 4	CBP 5	CBP 6	CBP 6	CBP 7	CBP 8	CBP 8	CBP 9	CBP10	CBP10						
	20-22	CBP 0	CBP 1	CBP 4	CBP 5	CBP 6	CBP 7	CBP 8	CBP 8	CBP 9	CBP 9	CBP 9	CBP10							

This chart is a guideline only. Consult tyre manufacturer for repair limitations.
For sidewall repairs use CSP series patches instead of CBP series patches.

For ply damages upto half of the carcass thickness on
Tread, Shoulder, Sidewall

Tread, Shoulder, Sidewall				SIZE OF INJURY								
PLY RATING	Inch	1/8"	3/8"	1/2"	1"	2"	3"	4"	5"			
	mm	3	10	13	25	50	75	100	125			
	8-12	CBP 0	CBP 1	CBP 2	CBP 3	CBP 4	CBP 6	CBP 7	CBP 8			
	14-18	CBP 0	CBP 1	CBP 2	CBP 4	CBP 5	CBP 6	CBP 7	CBP 8			
	20-22	CBP 0	CBP 2	CBP 3	CBP 5	CBP 6	CBP 7	CBP 8	CBP 9			

This chart is a guideline only. Consult tyre manufacturer for repair limitations.
For sidewall repairs use CSP series patches instead of CBP series patches.

SIZE OF INJURY							
PLY RATING	Inch	2"	3"	4"	5"	6"	7"
	mm	50	75	100	125	150	175
	4 - 6	CBP 5	CTP 1	CTP 1	CTP 2	CTP 2	CTP 3
	8 - 12	CTP 4	CTP 4	CTP 4	CTP 5	CTP 5	CTP 6
	14 - 16	CTP 4	CTP 5	CTP 5	CTP 6	CTP 6	CTP 7

This chart is a guideline only. Consult tyre manufacturer for repair limitations.




SIZE OF INJURY												
PLY RATING	Inch mm	½" (13mm)	1" (25mm)	2" (50mm)	3" (75mm)	4" (100mm)	5" (125mm)	6" (150mm)	7" (175mm)	8" (200mm)	9" (225mm)	10" (250mm)
	6 - 12	0	1	1	2	3	3	4				
	14 - 16	0	1	2	3	3	4	4				
	18 - 20		1	2	3	4	4	5	5			
	22 - 24		1	2	3	4	5	6	6	6	7	
	26 - 28		1	2	4	5	5	6	6	7	7	8
	30 - 36		1	2	4	5	6	7	7	8	8	8
	38 - 44		1	2	5	6	7	7	7	8	8	9
	46 - 50		2	3	5	6	7	7	8	9	9	9
	52 - 58		2	3	5	7	7	8	9	9	9	9
	60 - 68		3	4	6				9	9	9	9

This chart is a guideline only. Consult tyre manufacturer for repair limitations.



Passenger Tyre Repair Chart



A-B NON-REPAIRABLE AREA

Passenger	1½" (40mm)
Truck	
6.50- 7.00	2½" (65mm)
7.50-16.00	3" (75mm)
Tractor	
13.6-23.5	4½" (110mm)
24.5-30.5	5½" (140mm)
OTR	
14.00-16.00 (15.5- 17.5)	3" (75mm)
18.00-24.00 (20.5-29.5)	5" (125mm)
27.00-33.00 (33.25-37.5)	6" (150mm)
40/65-50/65 (40.5)	6¾" (170mm)
36.00	8" (200mm)
37.00 - 40.00 (50.5 & Larger)	10" (255mm)

Crown Injury Inch (mm)	SIDEWALL INJURY		Speed Rating ≤U	Speed Rating ≤U
	Width Inch (mm)	Length Inch (mm)		
¼" (6mm)	¼" (6mm)	½" (13mm)	10	10
	¼" (6mm)	2" (50mm)	12	
⅜" (10mm)	⅜" (10mm)	⅜" (10mm)	10 HD	
	⅜" (10mm)	1½" (40mm)	12 HD	
	⅜" (10mm)	2" (50mm)	14	
½" (13mm)	½" (13mm)	1½" (40mm)	12 HD	
	½" (13mm)	2" (50mm)	14	
¾" (20mm)	¾" (20mm)	¾" (20mm)	12 HD	
	¾" (20mm)	1½" (40mm)	12 HD	
	¾" (20mm)	2" (50mm)	14	
1" (25mm)	1" (25mm)	1½" (40mm)	14	
	1" (25mm)	2" (50mm)	14	



Tractor Radial Tyre Repair Chart

Shoulder Injury Inch (mm)	Crown Injury Inch (mm)	Sidewall Injury		Tractor Tyre Size		
		Width Inch (mm)	Length Inch (mm)	8-11 8.3- 12.4	12-15 13.6-23.5 440/65-600/65	24.5-30.5 625/75-1050/50
	⅜" (10mm)			15	15	20
⅜"(10mm)				20	20	20
		⅜" (10mm)	⅜" (10mm)	12	12	20
		⅜" (10mm)	1¼" (32mm)	20	20	22
		⅜" (10mm)	2" (50mm)	26	26	28
	¾" (19mm)	¾" (19mm)	¾" (19mm)	20	20	22
¾"(19mm)		¾" (19mm)	2" (50mm)	22	80	80
1"(25mm)				80	80	80
1½"(40mm)	1½" (40mm)	1½" (40mm)	3" (75mm)	80	82	82
		2" (50mm)	2" (50mm)	80	82	84
2"(50mm)	2½" (65mm)			82	84	84
		2½" (65mm)	4" (100mm)	80	82	84
2½"(65mm)					86	86
		3" (75mm)	3" (75mm)	82	82	84
		3" (75mm)	5" (125mm)		84	86
	3½" (90mm)	3½" (90mm)	4½" (115mm)		84	86
		3½" (90mm)	7" (180mm)			88
		4" (100mm)	4" (100mm)		84	86
		4" (100mm)	6" (150mm)		86	86
		4" (100mm)	10" (250mm)			90
	5" (125mm)	5" (125mm)	5" (125mm)		86	86
		5½" (140mm)	6¼" (160mm)		88	
		5½" (140mm)	8" (200mm)			90

Truck Radial Tyre Repair Chart



Crown Injury Inch (mm)	Shoulder Injury Inch (mm)	Sidewall Injury		Light Truck & Heavy Truck Tyre Sizes		
		Width Inch (mm)	Length Inch (mm)	6.00 - 12.50 7R - 10R 215 - 285	7.50 - 11.00 8R - 11R 235 - 285	11.00-14.00 12R-16.5R 295-495
1/4" (6mm)				10	10 HD / 15	10 HD / 15
5/16" (8mm)				15	17	17
3/8" (10mm)				20	20	33
1/2" (13mm)					33	33
3/4" (19mm)					33	35
1" (25mm)					35	37
1 1/4" (32mm)					37	37
	1/4" (6mm)			22	24	24
	5/16" (8mm)			22	24	24
	3/8" (10mm)			24	24	26
	1/2" (13mm)			40	40	40
	3/4" (19mm)			40	42	42
	1" (25mm)				44	44
	1 1/4" (32mm)					46
		1 Cable	1 1/2" (38mm)	20	20	20
		1 Cable	3" (76mm)	22	22	22
		1 Cable	4 3/4" (120mm)		24	24
		1 Cable	6" (150mm)		26	26
		2 Cable	3/4" (19mm)	20	20	22
		2 Cable	1 1/2" (38mm)	22	22	24
		2 Cable	2 1/2" (64mm)	22	24	26
		2 Cable	5 1/8" (130mm)		28	28
		3/8" (10mm)	1 1/2" (38mm)	22	26	40
		3/8" (10mm)	2 1/2" (64mm)	22	26	40
		3/8" (10mm)	3 1/8" (80mm)	26	28	42
		3/8" (10mm)	5 1/8" (130mm)		28	44
		1/2" (13mm)	1 1/2" (38mm)	22	40	40
		1/2" (13mm)	2 1/2" (64mm)	22	40	42
		1/2" (13mm)	4" (100mm)		42	44
		1/2" (13mm)	5" (125mm)		44	44
		3/4" (19mm)	1" (25mm)	22	40	42
		3/4" (19mm)	2 1/2" (64mm)	24	42	42
		3/4" (19mm)	4" (100mm)		42	44
		3/4" (19mm)	5" (125mm)		44	44
		1" (25mm)	2" (50mm)	40	42	44
		1" (25mm)	3 1/8" (80mm)		42	44
		1" (25mm)	4" (100mm)		44	46
		1 1/4" (32mm)	2" (50mm)		44	44
		1 1/4" (32mm)	3" (75mm)		44	44
		1 1/4" (32mm)	4" (100mm)			46

Radial Repair patches CRP 15,17,33, 35,37 are specially meant for crown injury repairs.
This chart is a guideline only. Consult tyre manufacturer for repair limitations.



OTR (Off The Road) Radial Repair Chart

Shoulder Injury Inch (mm)	Crown Injury Inch (mm)	Sidewall Injury		Earthmover Tyre Sizes				
		Width Inch (mm)	Length Inch (mm)	14.00-16.00, 15.5-20.5, 20/65-30/65	18.00-21.00, 23.5-26.5, 35/65	24.00-30.00 29.5-37.5, 40/65-45/65	33.00-44.00, 48/95-59/80, 50/65-65/65	50.5
3/8"(10mm)				24	24	24	42	42
3/4"(19mm)				46	46	50	52	52
1"(25mm)				46	50	52	52	52
1 1/2"(38mm)				52	52	52	56	56
2"(50mm)				52	52	52	56	60
2 1/2"(65mm)				56	56	72	72	72
2 3/4"(70mm)					72	60	60	60
3 1/2"(90mm)					60	62	62	62
	3/8"(10mm)			42	42	42	44	44
	3/4"(20mm)			45	45	45	45	45
	1"(25mm)			45	45	45	55	55
	1 1/2"(40mm)			45	55	55	55	55
	2"(50mm)			55	55	55	65	65
	2 1/2"(65mm)			55	55	55	65	75
	3"(75mm)			65	65	65	75	75
	3 1/2"(90mm)			65	65	65	75	75
	5"(125mm)			65	65	75	85	85
	6"(150mm)					75	85	85
		3/8"(10mm)	2 1/2"(65mm)	24	24	24	24	24
		1/2"(13mm)	4"(102mm)	44	44	44	44	44
		3/4"(19mm)	3"(76mm)	44	44	44	44	44
		1 1/4"(32mm)	2"(51mm)	44	46	46	46	46
		3/4"(19mm)	6"(150mm)	46	46	46	46	46
		1"(25mm)	4 1/2"(114mm)	46	46	46	46	46
		1 1/2"(38mm)	3"(75mm)	46	50	46	50	50
		1 1/4"(32mm)	10"(254mm)	50	50	50	50	50
		2"(50mm)	8"(200mm)	50	50	50	52	52
		2 3/8"(60mm)	6 1/2"(165mm)	50	50	50	50	50
		2"(50mm)	10"(250mm)	52	52	52	56	56
		3"(75mm)	7"(175mm)	52	52	52	52	52
		4"(102mm)	5"(125mm)	52	52	52	52	52
		4 1/2"(114mm)	4"(100mm)	52	52	52	52	52
		2"(50mm)	13 1/4"(350mm)		56	56	56	56
		3"(75mm)	9"(225mm)		56	56	56	56
		4"(100mm)	7"(175mm)		56	56	56	56
		4 1/2"(114mm)	6"(150mm)		56	56	56	56
		2"(50mm)	17"(430mm)		72	72 / 60	72 / 60	60
		3"(76mm)	11"(275mm)		72	72 / 60	60	60
		4"(100mm)	8"(200mm)		72	60	60	60
		4 1/2"(114mm)	7"(175mm)			60	60	60
		2 3/8"(60mm)	19"(480mm)			62	62	62
		4 1/2"(114mm)	10"(250mm)			62	62	62

Radial Repair patches CRP 45,55,65,75,85 are specially meant for crown injury repairs.
This chart is a guideline only. Consult tyre manufacturer for repair limitations.

6mm Strings	6mm Strings	4mm Strings	3mm Strings	3mm Strings	2mm Strings
					
BLACK 6mm X 100mm	BROWN 6mm x 100mm	BROWN 4mm X 100mm	BROWN 3mm X 100mm	BLACK 3mm X 100mm	BROWN 2mm x 50mm
					
BLACK 6mm X 200mm	BROWN 6mm X 200mm	BROWN 4mm X 200mm	BROWN 3mm X 200mm	BLACK 3mm X 200mm	

INSTRUCTION



Remove the object that caused puncture in the tyre. Check the direction of injury and mark it.



Place center of the string into the eye of the needle tool.




Insert spiral rasp tool into the injury hole, work up and down to clear inside of the hole.



Insert the string into the hole till 12mm of the string left out side the tyre and remove the tool.





Cut the excess string from the tyre.

Ref. No.	Description	Length		Thickness	 6mm Strings  6mm Strings  4mm Strings  3mm Strings  2mm Strings
		Inch	mm		
3501	Standard 100 x 6mm	4"	100mm	6mm (12 Strand)	
3502	Standard 200 x 6mm	8"	200mm	6mm (12 Strand)	
3503	Thin 100 x 4mm	4"	100mm	4mm (8 Strand)	
3504	Thin 200 x 4mm	8"	200mm	4mm (8 Strand)	
3505	Motor Cycle 100 x 3mm	4"	100mm	3mm (6 Strand)	
3506	Motor Cycle 200 x 3mm	8"	200mm	3mm (6 Strand)	
3507	Bicycle 50 x 2mm	2"	50mm	2mm (4 Strand)	

- Completely saturated rubber with two stage cure.
- Proven product quality and consistency.
- 100% leak proof. Tested in laboratory and road conditions.
- Perfect puncture repair for all tubeless tyres.
- Manufactured with high strength yarn and quality raw materials.
- Lead free strings also available.
- Also manufactured as per requirements.

Bestpatch Tubeless Tyre Repair Strings are available in the following configuration and can be custom made as per the requirements

Color : Brown, Black, Orange
 Thickness : 2mm, 3mm, 4mm, 6mm (4, 6, 8, 12 Strand)
 Length : 2", 3", 4", 6", 7", 8", 9"
 Packing : Poly Bag / Box / Bulk Packing

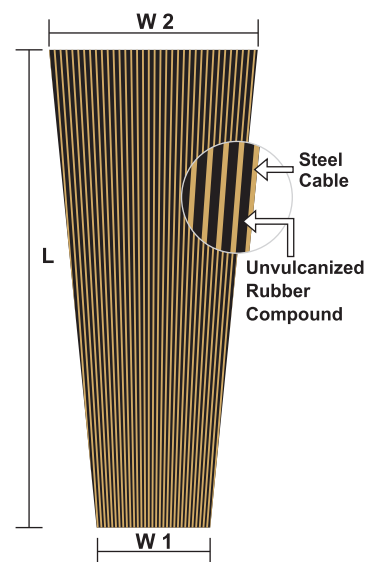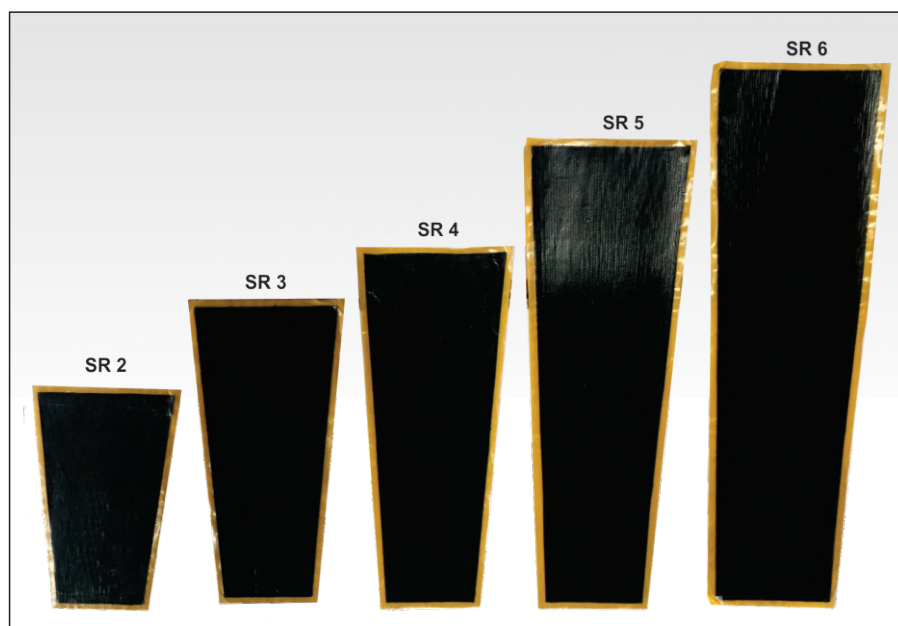

SR Series - Sidewall Injury Repairs

- Unvulcanized flexible Steel Cable Patches made to the structure of tyre construction for the sidewall and shoulder injuries
- To be applied from inside or outside the tyre injury
- Cover Patch to be applied over the steel cables
- Bulging in the tyre repair area minimized to the allowable standard industry limits


Ref. No.	Description	Size		Ply	
		Inch	mm		
6001	SR 1	14" x 4" x 5½"	355 x 100 x 140	1.2	
6002	SR 2	15" x 4" x 7"	380 x 100 x 180	1.2	
6003	SR 3	20½" x 6" x 10"	525 x 150 x 250	1.2	
6004	SR 4	25" x 6" x 10"	635 x 150 x 280	1.2	
6005	SR 5	32" x 6" x 11"	815 x 150 x 280	1.2	
6006	SR 5+	36" x 8" x 11"	915 x 200 x 280	1.2	
6007	SR 6	40" x 6" x 12"	1020 x 150 x 305	2.3	
6008	SR 7	48" x 6" x 12"	1220 x 150 x 305	2.3	
6009	SR 8	60" x 6" x 12"	1525 x 150 x 305	2.3	

MR Series - Crown Injury Repairs

- Unvulcanized flexible Steel cable patches constructed to repair crown injuries in radial tires
- To be applied from inside the tyre injury

Ref. No.	Description	Size		Ply	
		Inch	mm		
6101	MR 2	5" x 10"	125 x 250	1.2	
6102	MR 3	6½" x 10"	165 x 250	1.2	
6103	MR 4	7" x 10"	180 x 250	1.2	
6104	MR 5	9" x 10"	230 x 250	1.2	
6105	MR 6	11" x 10"	280 x 250	1.2	
6106	MR 7	14" x 10"	355 x 250	1.2	
6107	MR 8	18" x 10"	450 x 250	2.3	
6108	MR 9	24" x 10"	610 x 250	2.3	
6109	MR 10	28" x 10"	710 x 250	2.3	


* Curing to be done with the Suitable vulcanizing systems

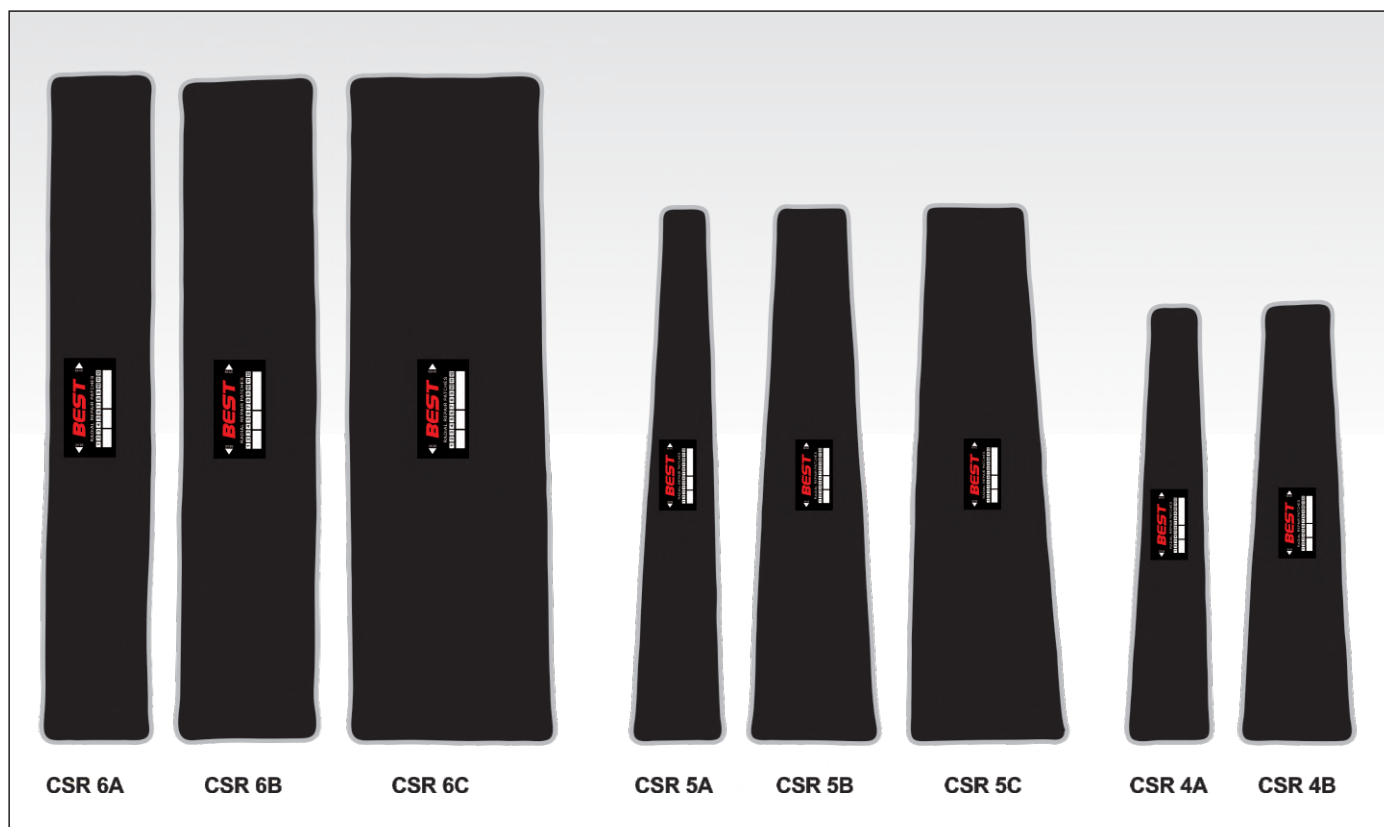

- CSR Series cover patches to be used inside the tyre with SR series sidewall steel cable patches.
- Available in Cloth back, Heat Cure and Uncure.
- All cover patches are fabric reinforced.

Ref. No.	Description	Inch	Size mm	Cloth back	Heat cure	Uncure
6201	CSR 1A	15" x 1 ³ / ₄ " / 3"	380 x 45 / 75	✓	✓	✗
6202	CSR 1B	15" x 2 ³ / ₄ " / 4 ³ / ₄ "	380 x 70 / 120	✓	✓	✗
6203	CSR 2A	16" x 2 ³ / ₈ " / 4"	410 x 60 / 100	✓	✓	✗
6204	CSR 2B	16" x 3 ¹ / ₂ " / 5 ³ / ₄ "	410 x 90 / 145	✓	✓	✗
6205	CSR 3A	22 ³ / ₈ " x 3" / 4 ¹ / ₂ "	570 x 75 / 115	✓	✓	✗
6206	CSR 3B	22 ³ / ₈ " x 4" / 6 ³ / ₄ "	570 x 100 / 170	✓	✓	✗
6207	CSR 4A	26 ³ / ₈ " x 3" / 5"	670 x 75 / 125	✓	✓	✓
6208	CSR 4B	26 ³ / ₈ " x 4 ¹ / ₄ " / 6 ³ / ₄ "	670 x 110 / 175	✓	✓	✓
6209	CSR 4C	26 ³ / ₈ " x 6 ⁵ / ₈ " / 10 ¹ / ₄ "	670 x 170 / 260	✓	✓	✓
6210	CSR 5A	33 ³ / ₈ " x 3 ¹ / ₈ " / 6"	850 x 80 / 150	✓	✓	✓
6211	CSR 5B	33 ³ / ₈ " x 4 ¹ / ₂ " / 8 ¹ / ₂ "	850 x 115 / 215	✓	✓	✓
6212	CSR 5C	33 ³ / ₈ " x 7" / 10 ¹ / ₂ "	850 x 180 / 270	✓	✓	✓
6213	CSR 6A	42 ¹ / ₄ " x 5 ¹ / ₂ "	1075 x 140	✓	✓	✓
6214	CSR 6B	42 ¹ / ₄ " x 8 ³ / ₄ "	1075 x 225	✓	✓	✓
6215	CSR 6C	42 ¹ / ₄ " x 12 ³ / ₄ "	1075 x 325	✓	✓	✓

CFC / CSC Series Crown Injury Repairs Fabric & Steel Reinforced

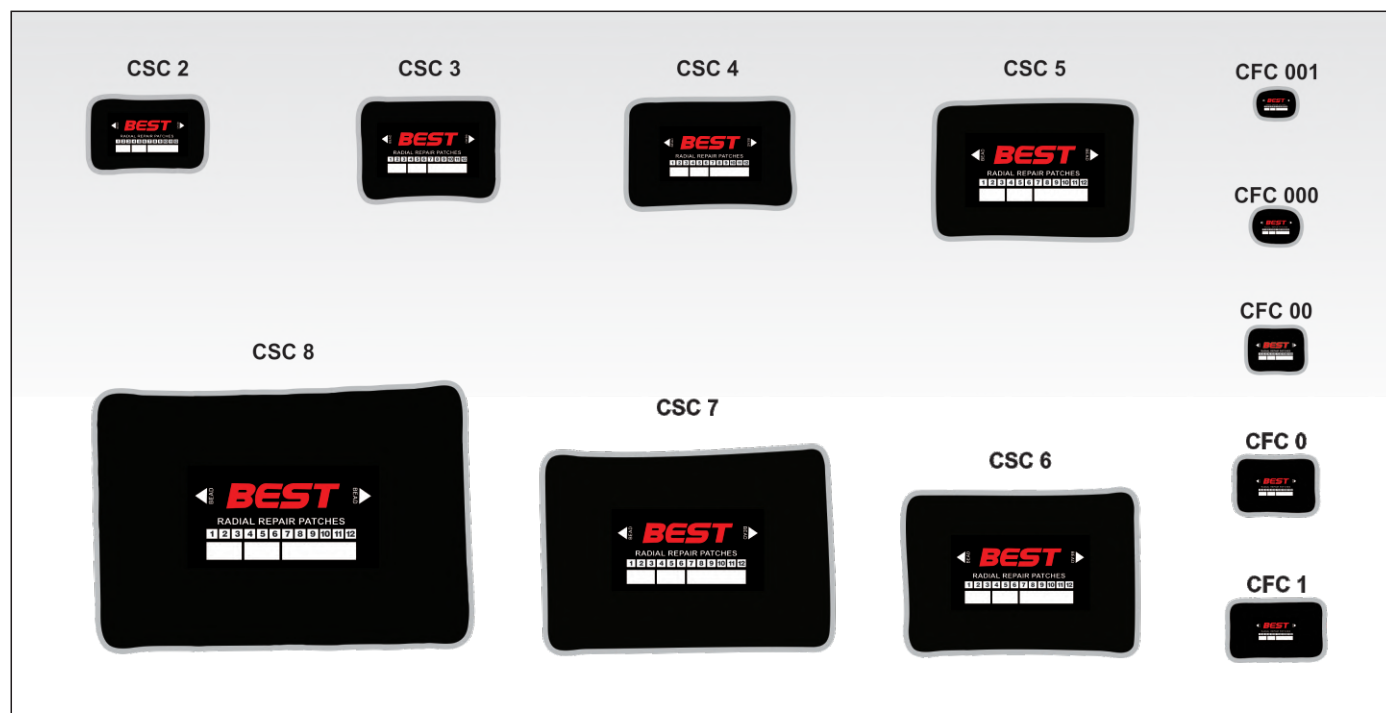

- CFC Series patches are fabric reinforced and used for the injuries where cables are not damaged
- CSC Series patches are made of steel cables reinforced with floater fabric plies
- CSC Series used for crown injuries in OTR tyres where cables are damaged
- CFC / CSC Series patches used to repair tyre crown injuries in OTR tyres
- CFC / CSC Series patches comes with Chemical and Heat Cure cushion backing.
- Uncure, Cloth Back patches are made to the specific request.


Ref. No.	Description	Size		Fabric Ply	Steel Ply	
		Inch	mm			
6301	CFC 001	2" x 1 3/8"	50 x 35	1	-	
6302	CFC 000	2 1/2" x 2"	65 x 50	2	-	
6303	CFC 00	3" x 2 3/8"	75 x 60	2	-	
6304	CFC 0	4 1/4" x 3 1/8"	110 x 80	2	-	
6305	CFC 1	5 1/8" x 3 1/8"	130 x 80	2	-	
6306	CSC 2	6 5/8" x 4"	170 x 100	2	1	
6307	CSC 3	7 7/8" x 5 1/2"	200 x 140	2	1	
6308	CSC 4	9 3/8" x 6 1/4"	240 x 160	2	1	
6309	CSC 5	11 3/8" x 7 7/8"	290 x 200	2	1	
6310	CSC 6	13 3/8" x 9"	340 x 230	3	1	
6311	CSC 7	16 1/2" x 11"	420 x 280	3	2	
6312	CSC 8	20 3/4" x 3 3/4"	530 x 350	3	2	

Universal Repair Patches for Crown, Sidewalls & Shoulder Injuries in Radial Tyres



- CFU Series for the application of the injuries in shoulder, sidewall and crown area.
- Patches made to the structure of tyre construction
- CFU Series Patches are fabric reinforced
- Aramid and polyester fabric used as reinforcement
- Aramid fabric gives excellent strength and flexibility with low heat built up in the tyres
- CFC/ CSC Series patches comes with Heat Cure cushion backing.

Ref. No.	Description	Size		Ply	
		Inch	mm		
6401	CFU 1	7" x 3¼"/2¾"	180 x 85 / 70	3	  
6402	CFU 2	9" x 4¼"/3½"	230 x 110 / 90	3	
6403	CFU 3	10¼" x 4¼"/ 3½"	260 x 110 / 90	3	
6404	CFU 4	11⅞" x 4¼"/ 3½"	300 x 110 / 90	4	
6405	CFU 5	13" x 4¼"/ 3½"	330 x 110 / 90	4	
6406	CFU 6	14⅞" x 5⅞"/ 4"	360 x 130 / 100	4	
6407	CFU 7	15¾" x 5¼"/4"	400 x 130 / 100	4	
6408	CFU 8	17¼" x 6"/4¾"	440 x 150 / 120	4	
6409	CFU 9	22⅜" x 7"/5½"	570 x 180 / 140	5	
6410	CFU 10	26⅜" x 7"/5½"	670 x 180 / 140	5	
6411	CFU 11	31½" x 8¼"/6¼"	800 x 210 / 160	5	

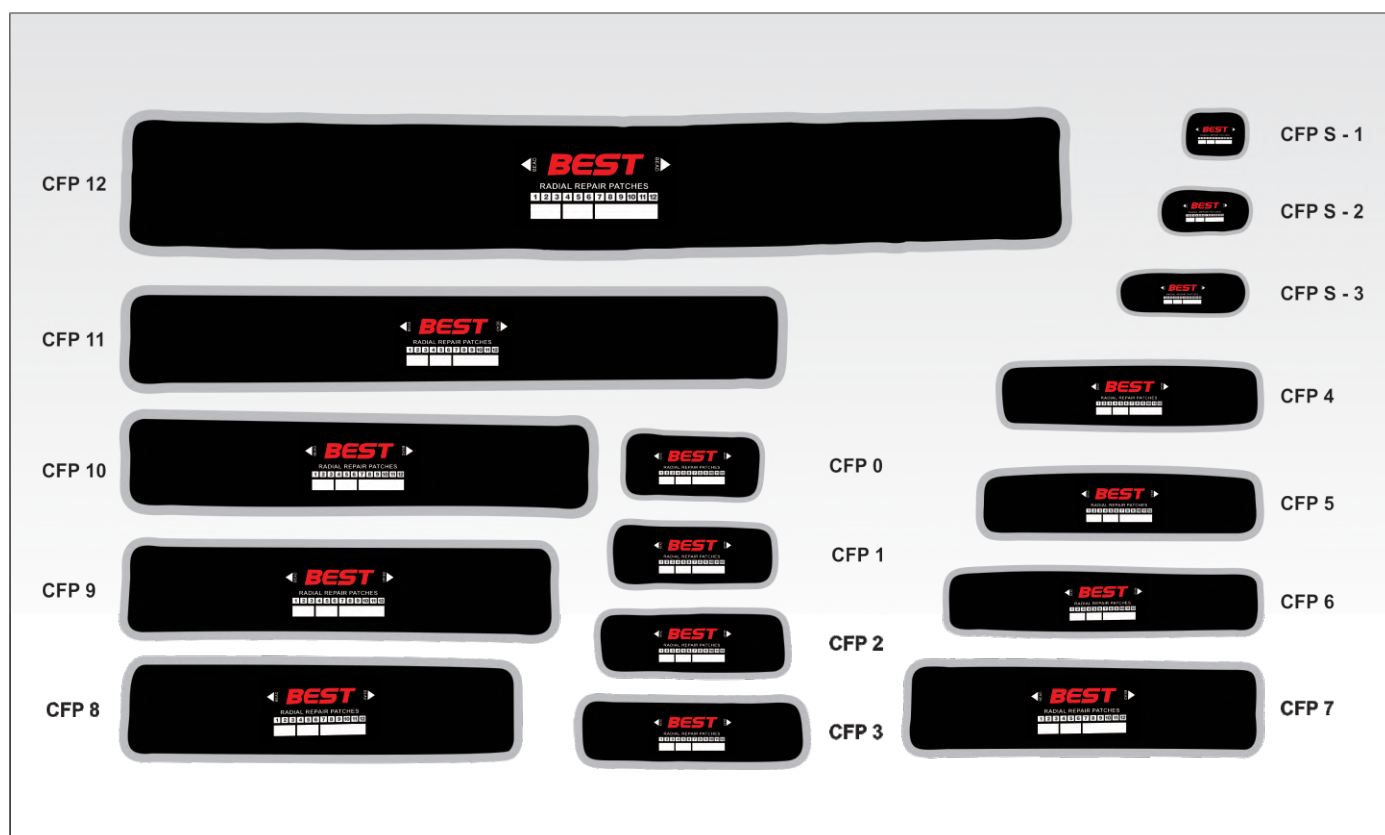

- CFP Series patches are used for the sidewall injuries where less than 4 cables damaged
- CFP Series patches are fabric reinforced
- Aramid and polyester fabric used as reinforcement
- Aramid fabric gives excellent strength and flexibility with low heat built up in the tyres

Ref. No.	Description	Size		Ply	
		Inch	mm		
6501	CFP S - 1	2 3/8" x 1 5/8"	60 x 40	1	
6502	CFP S - 2	4" x 1 5/8"	100 x 40	2	
6503	CFP S - 3	6" x 1 5/8"	150 x 40	2	
6504	CFP 0	6" x 2 1/2"	150 x 65	2	
6505	CFP 1	7" x 1 5/8"	180 x 65	3	
6506	CFP 2	8 3/8" x 1 5/8"	210 x 65	3	
6507	CFP 3	10" x 1 5/8"	250 x 65	3	
6508	CFP 4	11" x 1 5/8"	280 x 65	3	
6509	CFP 5	12" x 1 5/8"	310 x 65	3	
6510	CFP 6	14" x 1 5/8"	350 x 65	4	
6511	CFP 7	15 1/2" x 3 3/4"	390 x 95	4	
6512	CFP 8	16 3/4" x 3 3/4"	420 x 95	4	
6513	CFP 9	18 3/8" x 3 3/4"	460 x 95	4	
6514	CFP 10	20" x 3 3/4"	500 x 95	4	
6515	CFP 11	28 3/8" x 3 3/4"	710 x 95	4	
6516	CFP 12	43 1/2" x 7"	1090 x 175	4	



Round Tube Repairs

- Bestpatch tube repairs made of cured black body with self vulcanizing cushion gum
- Eight sizes available in round to repair tubes from motorcycle to earthmover.
- Use bestpatch CVF for perfect bonding.

Ref. No.	Description		Size		Box Qty
			inch	mm	
4001	Tiny Round 100 pcs Box	R 25	1"	25	100
4002	Mini Round 50 pcs Box	R 35	1 3/8"	35	100
4003	Small Round 40 pcs Box	R 43	1 3/4"	43	100
4004	Little Round 32 pcs Box	R 53	2 1/8"	53	100
4005	Medium Round 30 pcs Box	R 60	2 3/8"	60	100
4006	Large Round 20 pcs Box	R 80	3 1/8"	80	100
4007	Maxi Round 10 pcs Box	R 100	4"	100	100
4008	Giant Round 10 pcs Box	R 125	5"	125	10



Oval Tube Repairs

- Bestpatch tube repairs made of cured black body with self vulcanizing cushion gum
- Five sizes available in oval to repair tubes from motorcycle to earthmover.
- Use bestpatch CVF for perfect bonding.

Ref. No.	Description		Size		Box Qty
			inch	mm	
4009	Mini Oval 50 pcs Box	O 40	1 5/8" x 1 1/8"	40 x 30	100
4010	Small Oval 30 pcs Box	O 65	2 1/2" x 1 5/8"	65 x 40	100
4011	Medium Oval 20 pcs Box	O 100	4" x 2"	100 x 50	100
4012	Large Oval 10 pcs Box	O 150	6" x 2 3/4"	150 x 70	10
4013	Giant Oval 10 pcs Box	O 160	6 1/4" x 3 1/2"	160 x 90	10



Cycle Tube Repairs

- Bestpatch Cycle tube repair patches available in round, square and sheet form.
- Sheets can be used for puncture of any size in cycle tubes.
- Cost effective cycle tube repair patch
- Use bestpatch CVF for perfect bonding


Ref. No.	Description		Size		Box Qty
			inch	mm	
4014	Cycle Round 100 pcs pkt.		1 1/8"	28	25
4015	Cycle Square 100 pcs pkt.		1"	25	25
4016	Cycle Sheet CSS		12" x 9"	300 x 225	50
4016 A	Cycle Sheet CSB		15" x 15"	380 x 380	100






Tube Valve Repairs

- Bestpatch valve repairs are standard rubber base tube repair valves backed with chemically curable self vulcanizing cushion gum.

Ref. No.	Description		Size		Box Qty
			inch	mm	
4101	Tube Repair Valve	TR 29	2 1/8"	53	50
4102	Tube Repair Valve	TR 13 R	2 3/8"	62	40
4103	Tube Repair Valve	TR 15 R	2 3/8"	62	25
4104	Tube Repair Valve	TR 218 A	2 3/4"	70	10
4104A	Tube Repair Valve	TR 218 A Big	4 1/4"	110	10
4105	Tube Repair Valve	TR 75 A	3 1/2"	90	10
4106	Tube Repair Valve	TR 78 A	3 1/2"	90	10
4107	Tube Repair Valve	Squd Valve	4 1/4"	110	10
4108	Tube Repair Valve	TR 87 - 3	2 1/8"	53	50

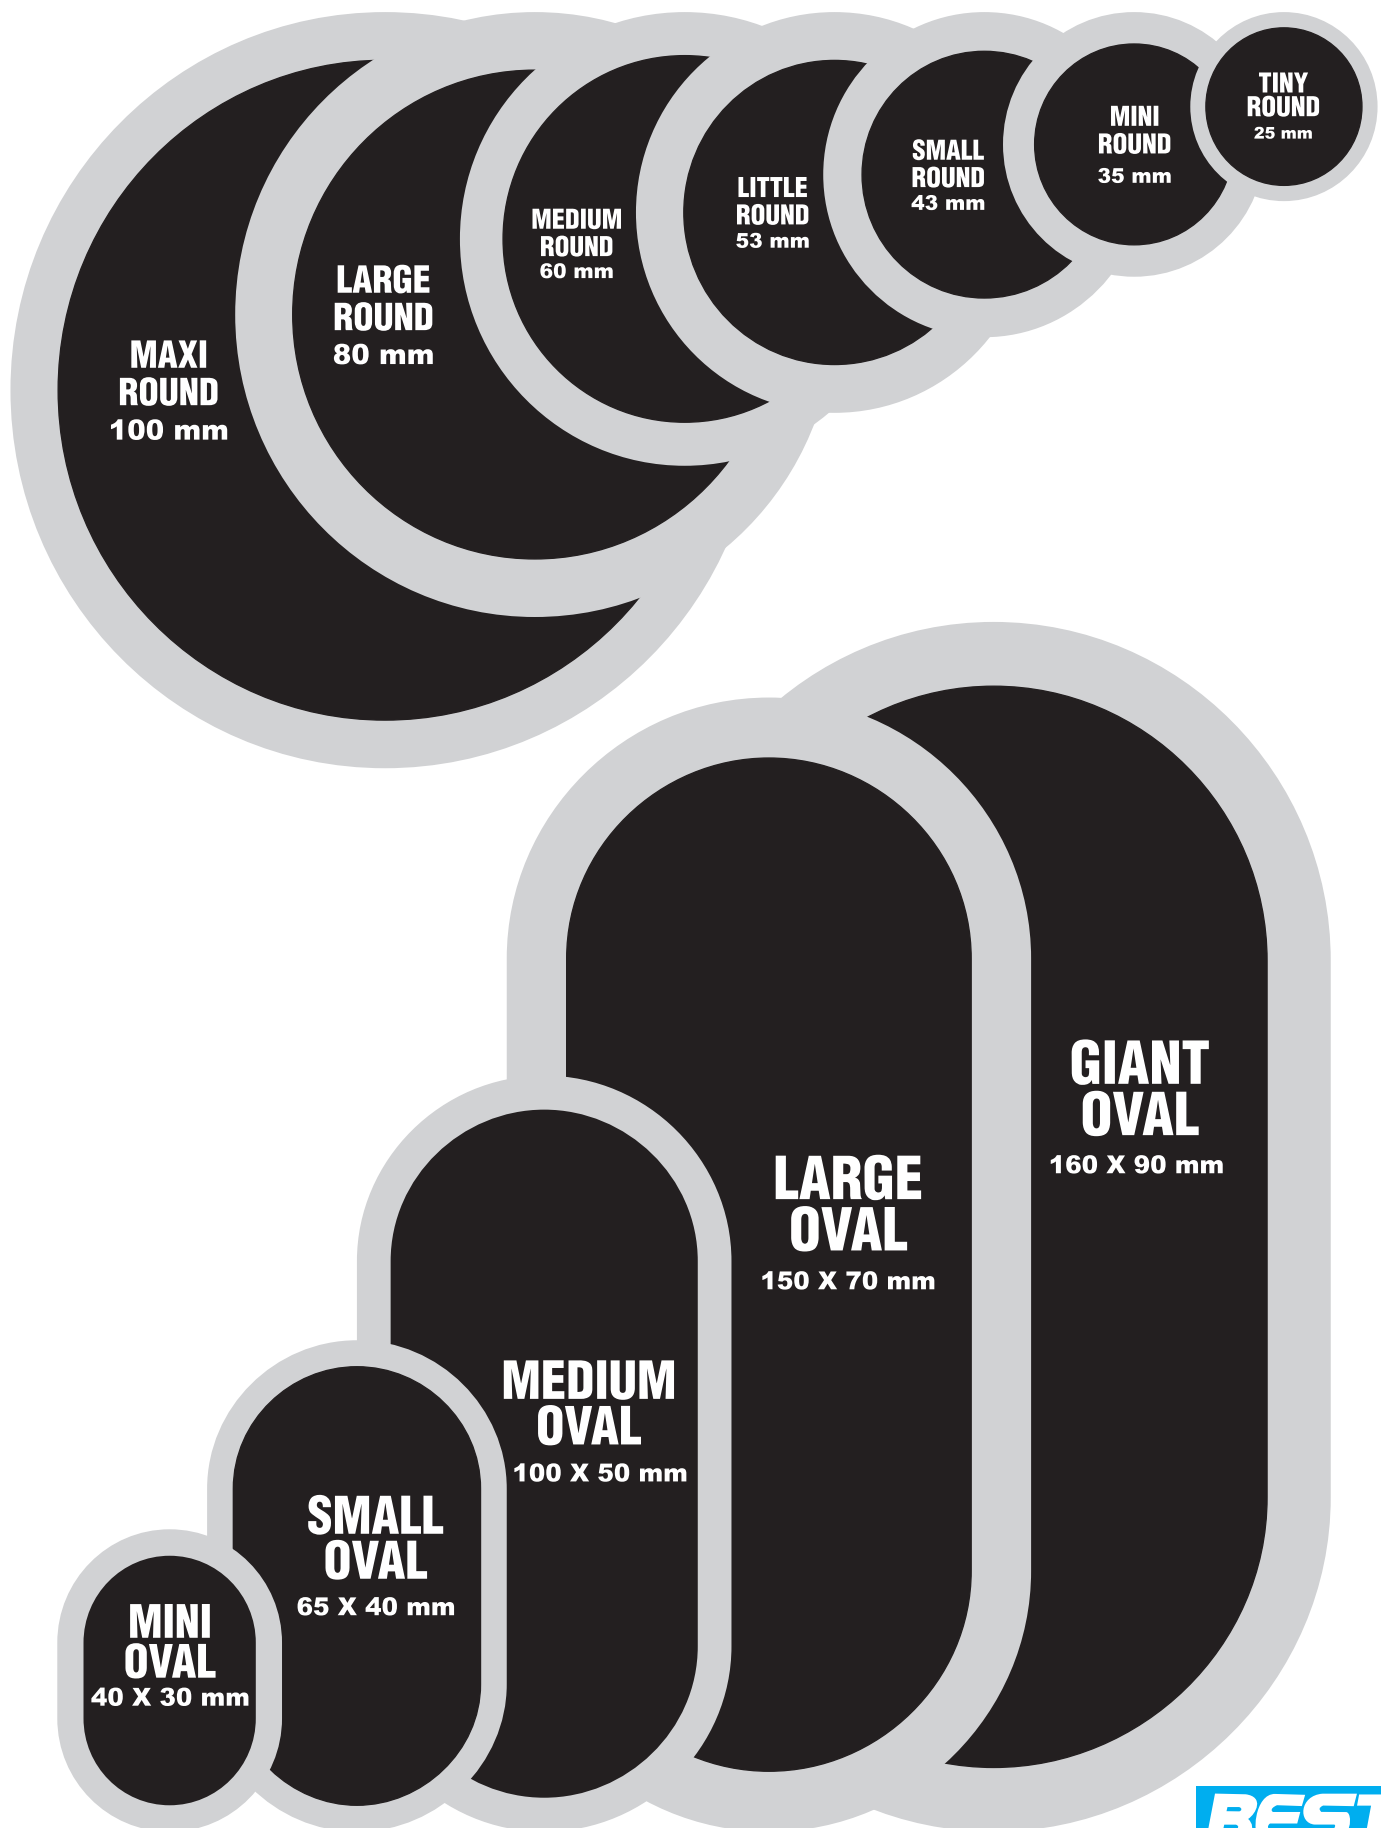

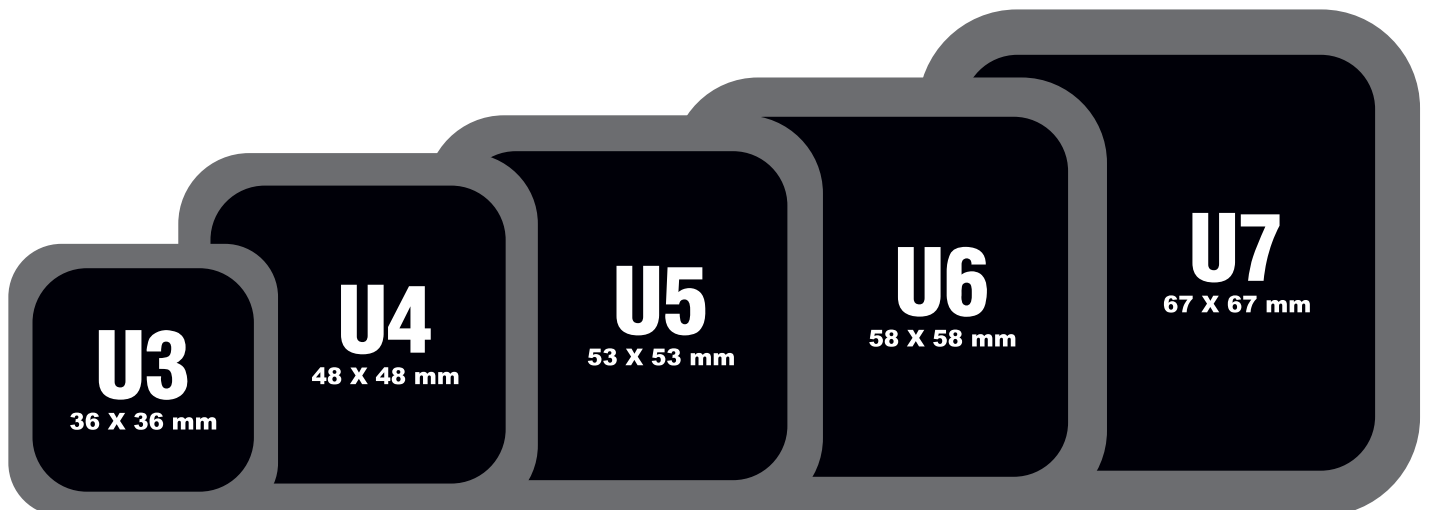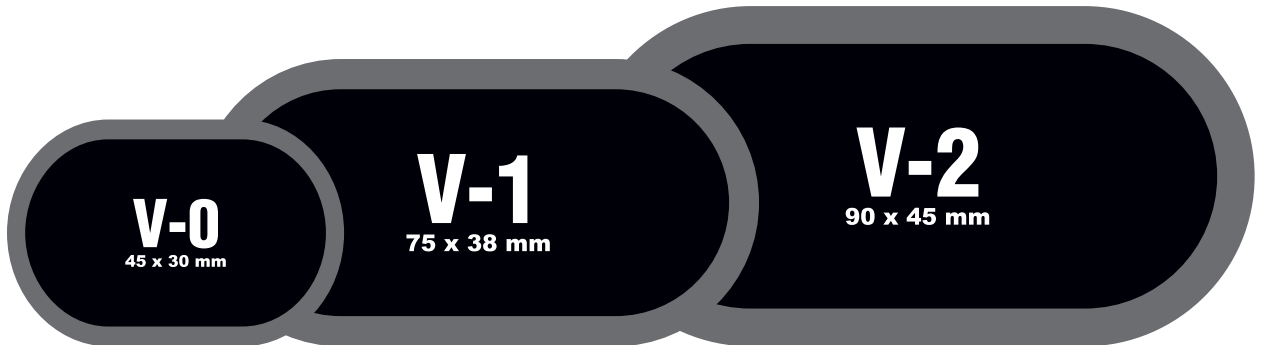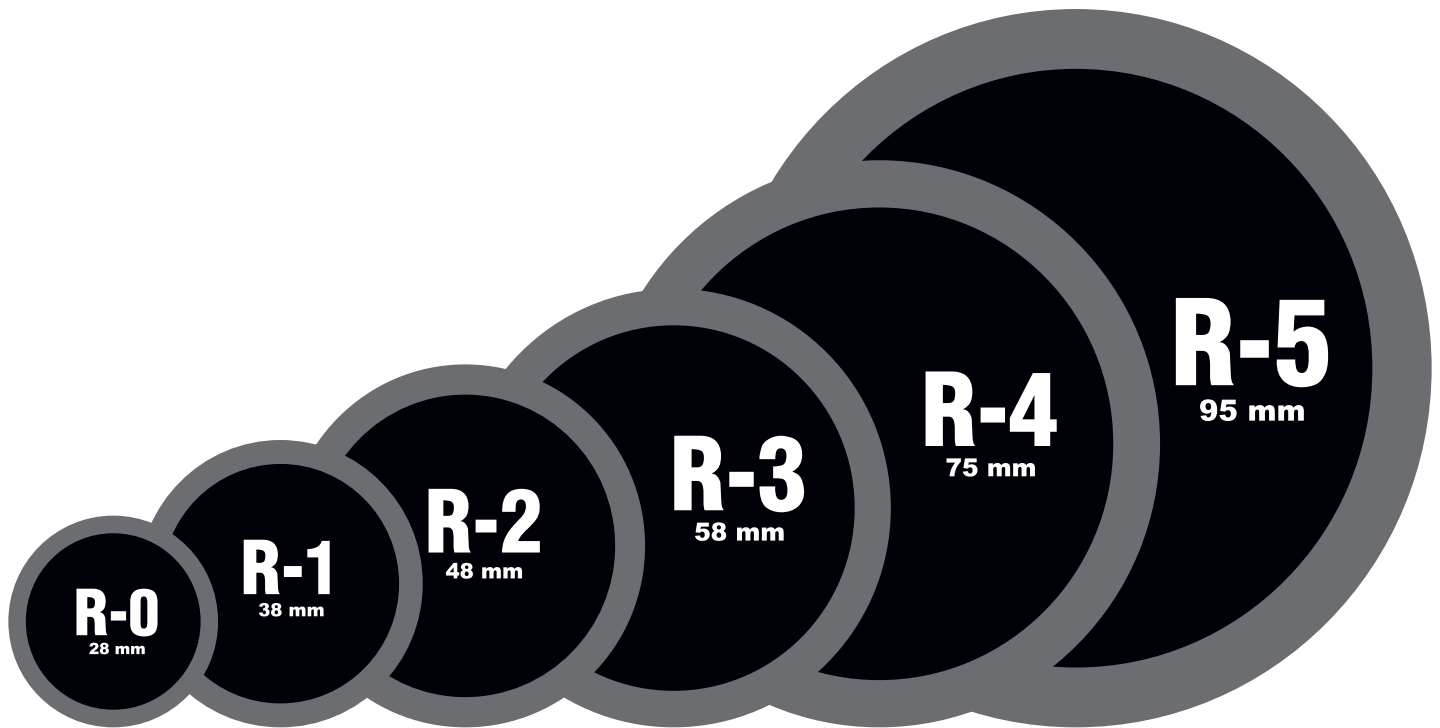




TYRE & TUBE REPAIRS

Catalog vol.3



Bestpatch Rubber

Rajagopalanpatty - 625 536, Andipatty (Tk), Theni (Dt), Tamilnadu, INDIA.
Telefax : +91-4546-242810 e-mail : info@bestpatch.in website : www.bestpatch.in



ISO 9001:2015 Certified Company